


1040000103 ล้อฟ้าแรงสูง 30kV 10kA คลาส 2  
สำหรับบริเวณที่มีมลภาวะ

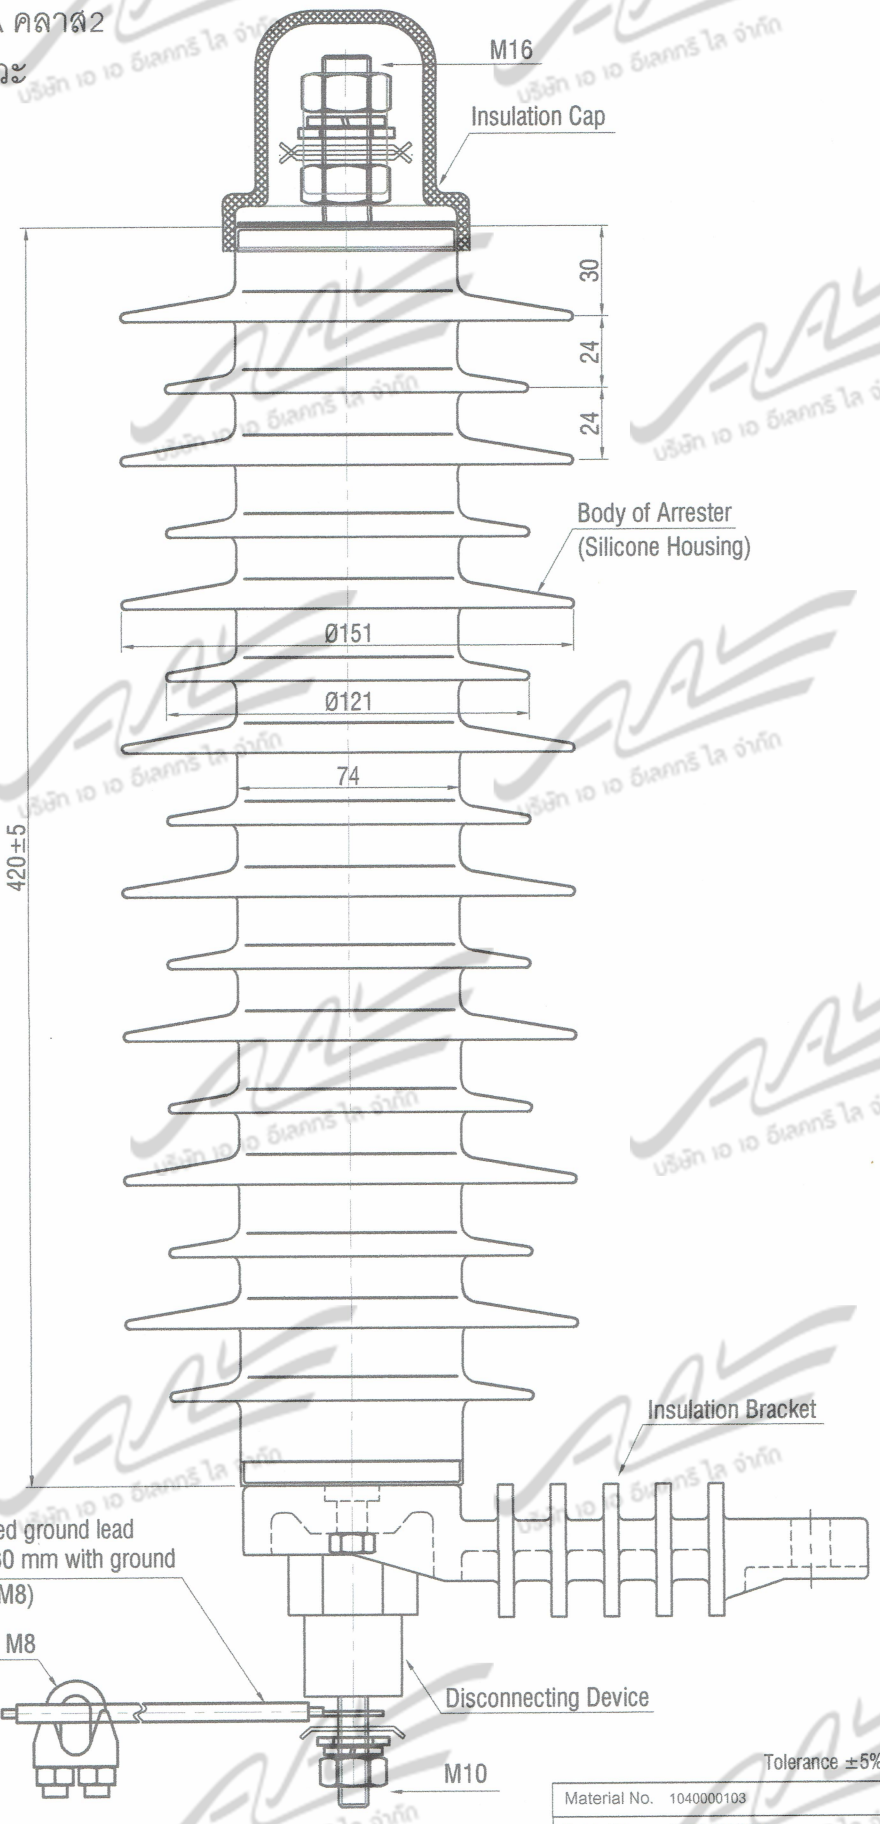

**Technical Performance**

- Applicable Standard IEC60099-4
- Rated Voltage(Ur) 30kV
- Max.continuous Operating Voltage (Uc) 24.4kV
- Nominal discharge current 10kA
- Creepage Distance 1250mm
- Max.residual Voltage At Lightning current impulse 8/20µs 85.5kV
- 4/10us high current impulse 100KA

Flexible copper insulated ground lead size 16 mm<sup>2</sup>,length 430 mm with ground connector (U-Clamp M8)

U clamp M8

Disconnecting Device

M10

Insulation Bracket

Tolerance ±5%

Material No.	1040000103		
Spec.No.	RPRO-003/2558		
Rev.0	Jan,00,2011	Scale	Dimension
		NTS	mm
		Material	Sheet
		Metal Oxide , etc.	1/1
		DWG No.	
		1040000103-04-S-00-01	
Revision			

Draft by  
*[Signature]*  
Approve  
*[Signature]*

A A ELECTRI LI CO.,LTD.  
95 Moo5, Lumpo, Bangbuatong  
Nonthabun, Thailand,11110  
02 158 4578  
www.aal2008.com

MODEL : ARR 3010 CLASS 2 [ pollution Area ]  
H.V.Surge Arrester 30 kV 10 kA  
ล้อฟ้าแรงสูง 30 kV 10 kA คลาส 2  
สำหรับบริเวณที่มีมลภาวะ