


1030010101 ลูกถ้วยพินโพลท์ไทพ์ 22 kv (แบบ 56/57-2)

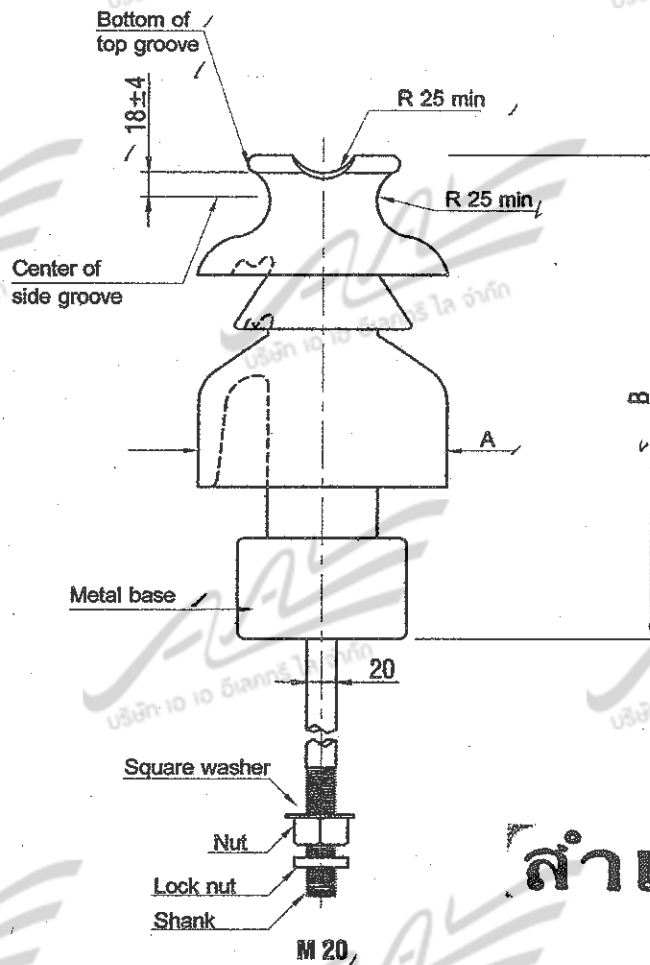

ต้นฉบับ

สำเนา

No.	Product Code (PEA Mat. No.)	Product Type/Size	Dimension in mm			
			Leakage distance, minimum	Protected leakage distance, minimum	A	B
1	1030010101	Pin - post Insulator (56/57-2)	534	267	Ø170	336

MECHANICAL VALUES	Cantilever strength	12.5	kN
	Cantilever proof load	5	kN
ELECTRICAL VALUES	Low-frequency dry flashover	110	kV
	Low-frequency wet flashover	80	kV
	Critical-impulse flashover, positive	180	kV
	Critical-impulse flashover, negative	205	kV
RADIO-INFLUENCE VOLTAGE DATA	Low-frequency test voltage, rms to ground	22	kV
	Maximum RIV at 1,000 kHz, Radio freed	100	µV
COLOUR OF INSULATOR	BROWN		

Tolerance ±5%

Draft by 	 A A ELECTRI LI CO.,LTD. 95 Moo5, Lumpo, Bangbuatong Nonthaburi, Thailand,11110 02 158 4576 - 7 www.aal2008.com	Pin - post Insulator 22 kV (Class 56/57-2) - TIS 1251	Rev.0 Jan,13,2015	Scale NTS	Dimension mm.	Sheet 1 / 1	
Approve by 			ลูกถ้วยพินโพลท์ไทพ์ 22 kv (แบบ 56/57-2) มอก.1251		Material	See on drawing	
					DWG No.	1030010101-01-S-00-01	
				Revision			